






Static Rings

In accordance to IEC 641-1 Type B 3.1

Features:

Metallization: Lahnband
Insulation: Crepepaper
Pigtail: E-Cu \varnothing 6 Rope-Lay

- Made of PUCARO Transformerboard
- Precompressed pressboard, even fibre orientation, hard and dimensionally stable
- 100 % sulphate wood pulp
- Good compatibility with liquid dielectrics
- **Insulation class A** (105 °C) in accordance to VDE 0530 Part 1




Technical Data

Static Rings

In accordance to IEC 641-1 Type B 3.1

Dimensions and tolerances:

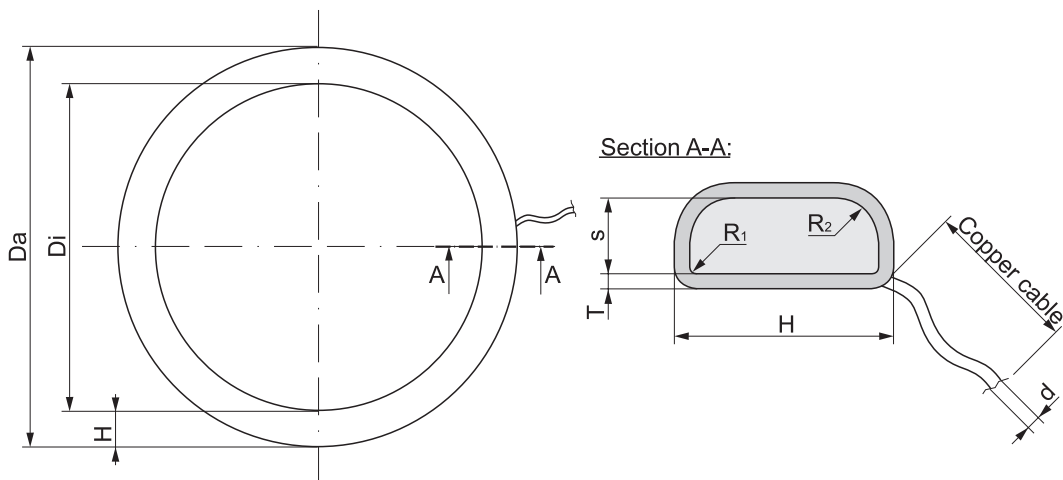

Dimensions		Tolerances
Da max.	2500 mm	+2 / -0 mm
Di min.	300 mm	+2 / -0 mm
H max.	150 mm	+1 / -0 mm
T	2 - 3 mm	± 0.5 mm
S	8 - 60 mm	± 0.5 mm
R1	1 - 5 mm	± 1 mm
R2	6 - 30 mm	± 1 mm
d	6 ∇ E-Cu	

Other dimensions on request.

The above values, which have been determined by careful tests, provide only general information. PUCARO has implemented several programs to assure the highest quality and reliability of this product. However, no responsibility is assumed for its use.